EIZO®

Clinical Review Monitors

RadiForce® MX-Series

Future Focused

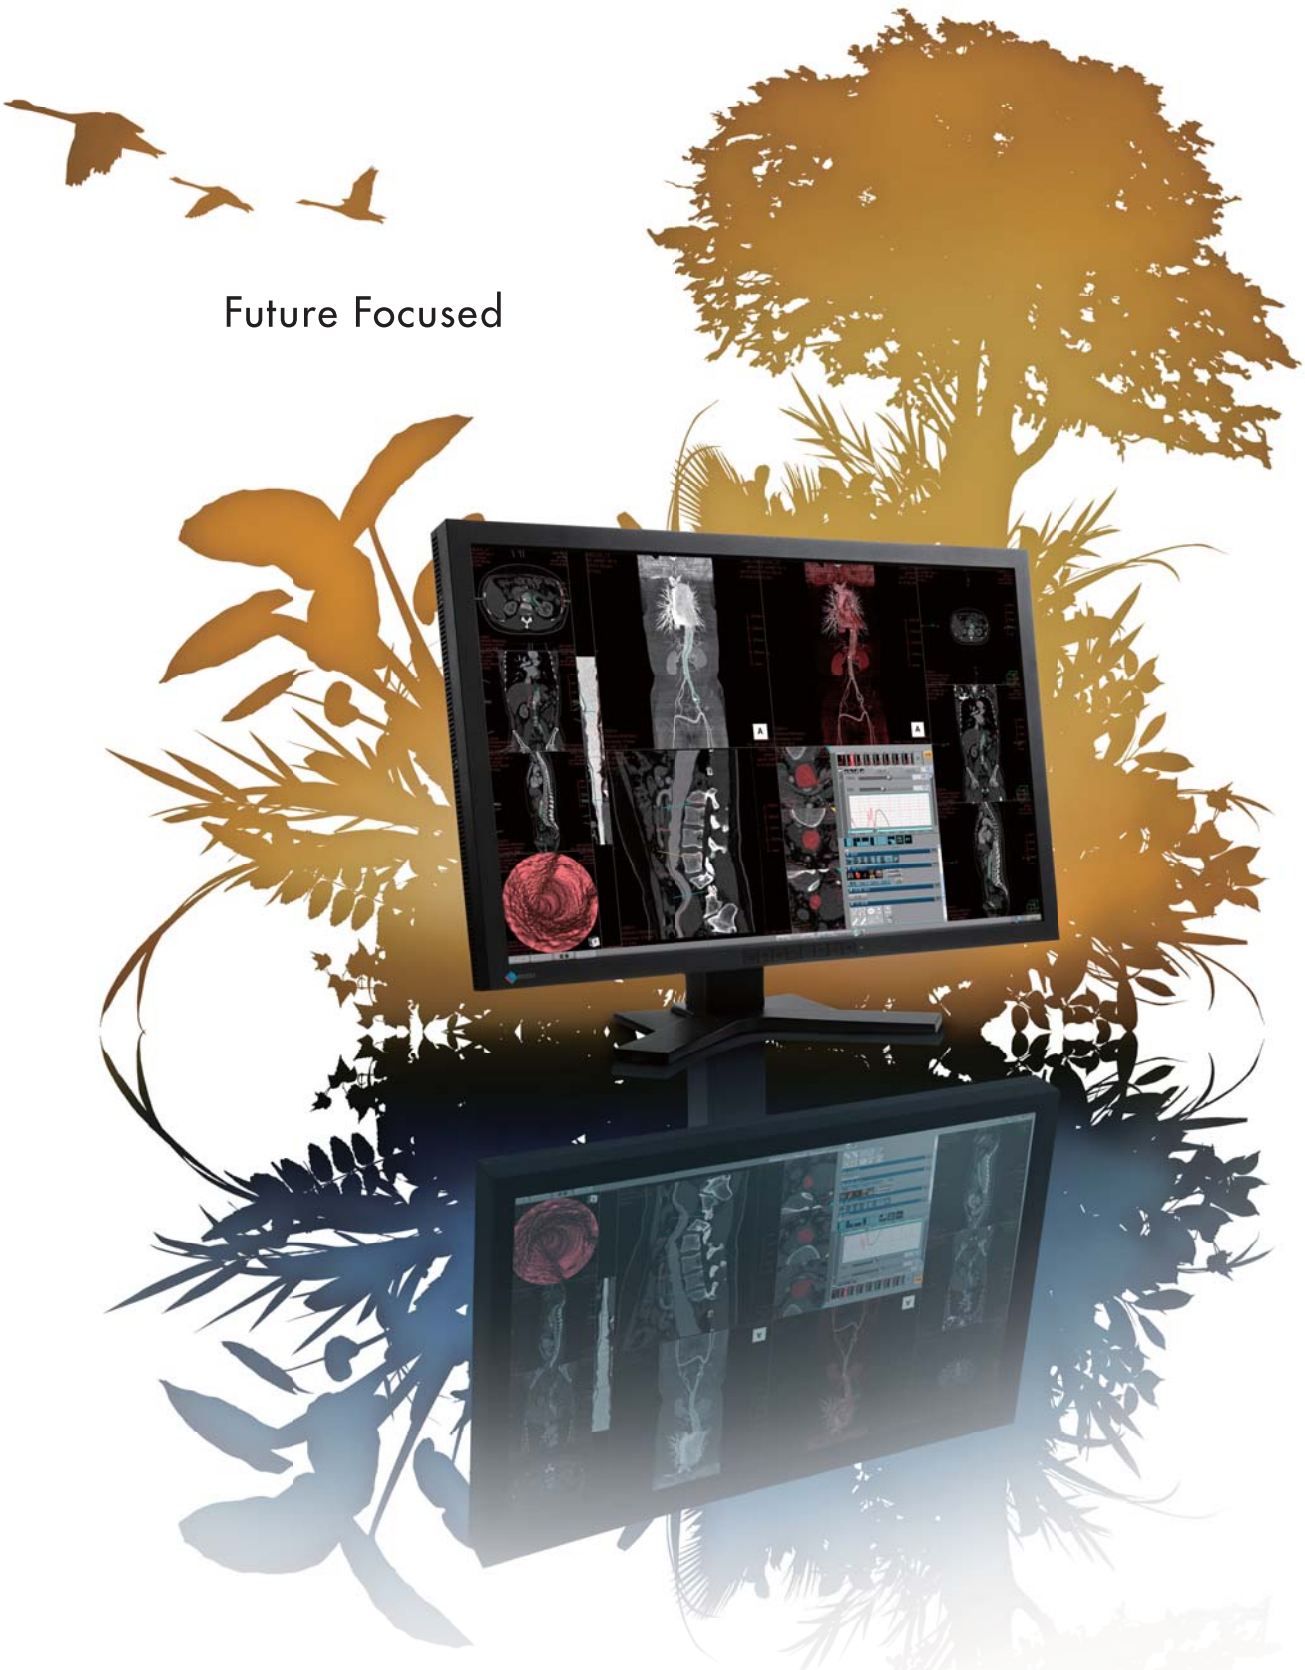

Future Focused

EIZO's complete spectrum of RadiForce medical monitor solutions delivers exceptionally accurate and stable image display at leading hospitals around the world.

Our commitment to technological innovation includes making products that are as ergonomically, environmentally, and economically-friendly as possible.

With the shift to completely filmless systems for improved efficiencies in patient care, EIZO will continue to provide products of unsurpassed quality, consistency, and value that are truly future focused.

Selecting the Optimum Monitor for Clinical Review

Display Differs Depending Upon Grayscale Tones

Standard monitors for general office use have grayscale tone characteristics which may vary even between the same models. In the medical field, monitors must display medical images accurately and consistently. Digital Imaging and Communications in Medicine (DICOM) Part 14 specifies a display function for grayscale which is now used as a standard to adjust the grayscale tone characteristics of monitors used in the medical field.

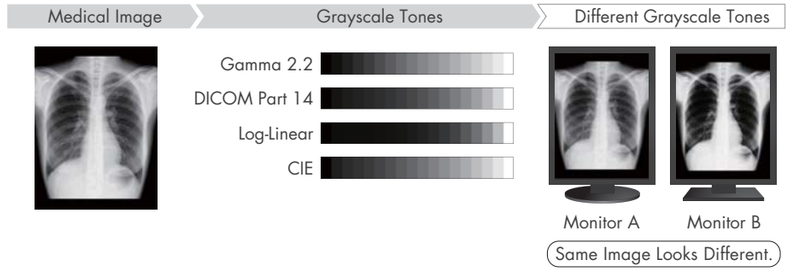

Cost-Efficiency Demanded Under Clinical Review Applications

Medical images can now be reviewed with clinical record applications. However, it is costly for hospitals to install high-performance, DICOM calibration compatible medical display monitors throughout the entire hospital, and a cost-efficient solution is demanded for clinical review application usage environment.

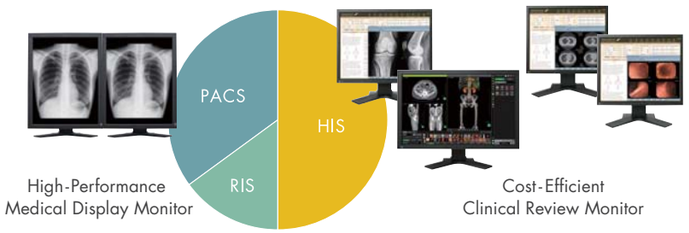

Calibration to the DICOM Part 14 Compliant and Superior Cost Performance Monitor is Optimum for Clinical Review

With the bundled RadiCS LE quality control software installed, a self-diagnosis function using a built-in backlight sensor periodically checks for brightness irregularities of RadiForce MX-Series monitors. Furthermore, the self-calibration function is set with the scheduling function. Simplified calibration compliant with the DICOM Part 14 standard is periodically performed to correct the grayscale tones and brightness of the monitor. Superior cost performance will be achieved when installing a large number of monitors compliant to DICOM Part 14 in clinical review application usage environment.

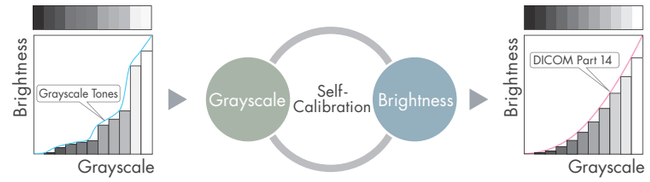

4MP WIDE
MX300W
76 cm (29.8") Color LCD Monitor

2.3MP WIDE
MX241W
61 cm (24.1") Color LCD Monitor

2.3MP WIDE
MX240W
61 cm (24.1") Color LCD Monitor

2.3MP WIDE
MX220W
56 cm (22") Color LCD Monitor

2MP
MX210
54 cm (21.3") Color LCD Monitor

1MP
MX191
48 cm (19") Color LCD Monitor

1MP
MS170
43 cm (17") Color LCD Monitor

The RadiForce MX-Series of cost performance clinical review monitors deliver calibration that is compliant with DICOM Part 14.
Ideal for viewing patient charts with MRI and CT medical images in DICOM Part 14 standard.
Widescreen and square formats in various resolutions to meet the diverse needs of hospitals.

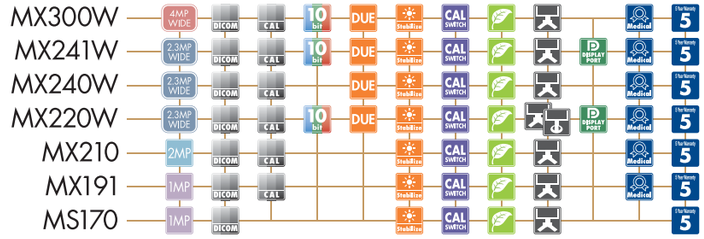

Feature

High-Definition Images

DICOM Part 14 Compliant

To ensure the most accurate and consistent shadings possible, EIZO carefully measures and sets every grayscale tones on the production line to produce a monitor compliant with DICOM Part 14.

Simplified Calibration

When the self-diagnosis function, utilized with bundled RadiCS LE quality control software, detects a change in luminance, a warning icon appears on the desktop taskbar enabling prompt correction. Furthermore, the self-calibration function, a simplified calibration compliant with the DICOM Part 14 standard, can periodically be performed to correct the grayscale tones and brightness of the monitor.

4 Megapixel Bezel-Less Widescreen

Displaying 4 megapixel information volume on one monitor improves your working efficiency and cost performance. No bezels in between requires less eye movement with less stress as compared with dual 2 MP monitors.

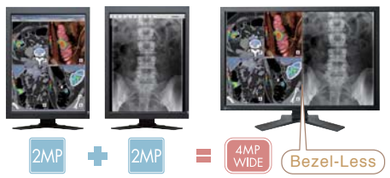

Widescreen

The widescreen 16:10 aspect ratio provides significantly more horizontal space than the 4:3 or 5:4 aspect ratios of conventional square monitors. The screen is wide enough so that you can keeep tool palettes open without covering the window you're working on.

10-bit Color

Each RGB color is supported with a 10-bit input compatibility that displays more than 1 billion colors, providing smooth color tones for 3D color rendering and image fusion.

10-bit color graphics board and viewer software needed for 10-bit color display.

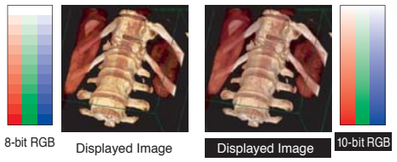

Brightness Uniformity

The Digital Uniformity Equalizer (DUE) function provides optimum backlight luminance uniformity which is difficult to attain due to the characteristics of LCD monitors, especially with larger screen sizes.



Brightness Stabilization

At startup or upon wakeup, the EIZO patented drift correction function quickly stabilizes the brightness level. In addition, a sensor measures the backlight brightness and compensates for brightness fluctuations caused by the ambient temperature and the passage of time.

This brightness stabilization function is EIZO patented technology (Japan patent numbers 3171808 and 3193315, US patent number 6188380).

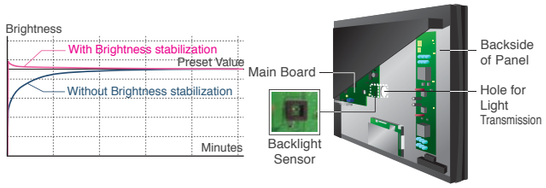

Ergonomic Features

Calibration Mode Selection

Selectable with the front panel buttons, the CAL Switch function allows for various calibration modes of different modalities such as CR, CT, and endoscope images. Furthermore, auto mode settings can be made with the Auto CAL Switch function.

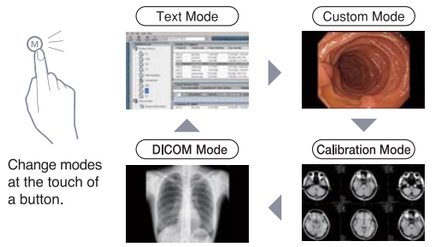

[MX240W Usage Example]

Backlight Saver with Screen Saver

With ScreenManager Pro for Medical utility software installed, the Backlight Saver function turns off the monitor's backlight when the screen saver is activated, and turns it on again when the computer comes out of screen saver mode. This function helps to reduce power consumption when the monitor is used for a prolonged period of time.

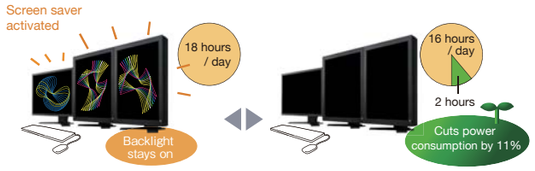

Backlight Saver with Viewer Application

By setting the Backlight Saver function to operate with viewer application, the monitor's backlight is on while the viewer is being used and the backlight is off while the viewer is not being used.

Height Adjustable Stand

The height and tilt adjustable stand offers added flexibility and viewing comfort. 90° pivot for portrait mode gives you versatility with images or applications requiring more vertical viewing space.

Graphics board that supports portrait mode is required for vertical viewing.

[MX300W Usage Example]

New FlexStand

The highly-versatile FlexStand offer tilt, swivel, height adjustment, and also portrait rotation and laptop-like screen placement which can adjust to any clinical review environment.



DisplayPort Connectivity

Next-generation DisplayPort connectivity allows signal information transmission via a single, high-bandwidth cable at distances up to 15 meters without any signal degradation.

High Quality Assurance

Medical Standards

Meets the strictest medical, safety and EMC emissions standards including TÜV/GM, UL60601-1, CE, CB, CSA C22.2 No.601-1, VCCI, FCC, and FDA 510(k).

5 5 Year Warranty

EIZO and its authorized distributors offer a five-year limited warranty.

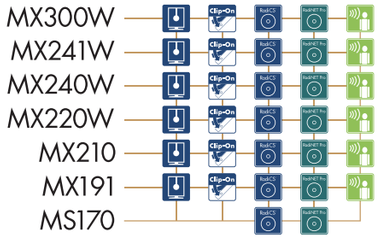

Quality Control Solutions

More Precise Calibration with UX1 Sensor

By using the UX1 sensor (sold separately) with the bundled RadiCS LE software, more precise calibration compliant with the DICOM Part 14 standard can be performed.

Clip-On Swing Sensor

Easy calibration compliant with the DICOM Part 14 standard can be performed with the Clip-On Swing Sensor G2 (sold separately). Once attached to the top of the monitor, it can remain in place and is ready for use. This saves the time and trouble of attaching and removing it when performing QC tasks.



Monitor Quality Control Standards Compliance

Quality control tool RadiCS UX1 (sold separately) enables you to perform basic quality checks necessary for clinical review monitors. In addition, high-performance calibration compliant with the DICOM Part 14 standard corrects the fluctuation in monitor quality.

Centralized Management of All Monitors

RadiNET Pro (sold separately) enables centralized management of calibration tasks, history data of multiple RadiCS clients via a network, and remote QC functions.

Presence Sensor for Convenience

The presence sensor on the front of the Clip-On Swing Sensor G2 determines whether to start QC tasks such as calibrations automatically at scheduled times. If the user is working, the QC task stays in stand-by mode, and when the user is away from the monitor the task is performed.



QC task in stand-by mode while seated

QC task performed while away

Presence Sensor for Power Savings

The presence sensor feature unites convenience with savings by ensuring that the monitor conserves power when it is not in use. The presence sensor prompts the monitor to switch to power save mode when it detects the user away from the monitor, and then resume normal operation when the user returns.

Switch to power save at user's absence

Screen activates at user's presence

Environment Awareness

EIZO Eco Products — A Commitment to Environmental Preservation over the Product Life Cycle

The development, implementation, and revision of the EIZO Eco Products internal environmental label stems from EIZO's longstanding commitment to manufacturing environmentally sound products and its desire to provide consumers with an instantly recognizable means to assess their environmental performance. Based on the 3Rs (Reduce, Reuse, Recycle) and energy savings, EIZO has introduced four versions of this label with EIZO Eco Products 2009 being the most recent.

EIZO Eco Products 2009 Requirements

1) User's manual made with chlorine-free, recycled paper.
2) Subject to an internal product environmental assessment.
3) Partial use of recycled plastic.
4) Partial use of soy ink with supplied printed materials.
5) Use or partial use of plastic containing raw plant materials.
6) Use of recycled Styrofoam or paper in packaging cushioning materials.
7) Meets VOC (volatile organic compounds) guidelines for PCs as established by JEITA*.
8) Complies with the RoHS directive.
9) Power consumption of zero watts when turned off.
10) Power consumption of less than 1.5 watts in power-save mode.
11) Satisfy the requirements of the International Energy Star Program when in normal operation.
12) Eco profile available on website.

Previous versions of this label are EIZO Eco Products 2006 which covers the first eight requirements.

**JEITA is the Japan Electronics and Information Technology Industries Association. JEITA established guidelines to limit emission levels of VOCs from PCs. The guidelines are a countermeasure against health hazards caused by VOC contaminants released from furniture, everyday objects, and building materials that accumulate indoors. EIZO carries out evaluations based on these guidelines.*

Accessory Compatibility

	Flexible Arm	Wall Mount Arm		Dual Height Adjustable Stand	Panel Protector
	LA-131-D	LA-030-W	LA-011-W	LS-HM1-D	PANEL PROTECTOR
MX300W	—	—	—	—	— (MX300W-C: Built-In Panel Protector)
MX241W MX240W	○	○	○	—	FP-2400W
MX220W	○	○	○	—	FP-2202W
MX210	○	○	○	○	FP-2101
MX191	○	○	○	○	FP-702
MS170	—	—	—	○	FP-505

Monitor Cleaning Kit

ScreenCleaner

Specifications

4MP WIDE MX300W

76 cm (29.8") Color LCD Monitor

2.3MP WIDE MX241W

61 cm (24.1") Color LCD Monitor

2.3MP WIDE MX240W

61 cm (24.1") Color LCD Monitor

2.3MP WIDE MX220W

56 cm (22") Color LCD Monitor

2MP MX210

54 cm (21.3") Color LCD Monitor

1MP MX191

48 cm (19") Color LCD Monitor

1MP MS170

43 cm (17") Color LCD Monitor

Model Variations	MX300W : without Panel Protector MX300W-C : with Panel Protector	–	–	MX220W-H : Height Adjustable Stand MX220W-FS : FlexStand	–	–	–	Model Variations
Cabinet Color	Black	Black, Gray	Black	Black	Black, Gray	Black, Gray	Black, Gray	Cabinet Color
Panel	TFT Color LCD Panel (VA)	TFT Color LCD Panel (IPS)	TFT Color LCD Panel (VA)	TFT Color LCD Panel (VA)	TFT Color LCD Panel (VA)	TFT Color LCD Panel (VA)	TFT Color LCD Panel (VA)	Panel
Active Display Size (H × V)	641.3 x 400.8 mm	518.4 x 324.0 mm	518.4 x 324.0 mm	473.7 x 296.1 mm	432.0 x 324.0 mm	376.3 x 301.0 mm	337.9 x 270.3 mm	Active Display Size (H × V)
Viewable Image Size	Diagonal : 756 mm	Diagonal : 611 mm	Diagonal : 611 mm	Diagonal : 558 mm	Diagonal : 540 mm	Diagonal : 481 mm	Diagonal : 432 mm	Viewable Image Size
Native Resolution	2560 x 1600	1920 x 1200	1920 x 1200	1920 x 1200	1600 x 1200	1280 x 1024	1280 x 1024	Native Resolution
Pixel Pitch	0.2505 x 0.2505 mm	0.270 x 0.270 mm	0.270 x 0.270 mm	0.247 x 0.247 mm	0.270 x 0.270 mm	0.294 x 0.294 mm	0.264 x 0.264 mm	Pixel Pitch
Display Colors	10-bit colors : 1.07 billion (maximum) colors 8-bit colors : 16.77 million from a palette of 8.50 billion colors	10-bit colors Display Port : 1.07 billion (maximum) colors 8-bit colors : 16.77 million from a palette of 68 billion colors	16.77 million from a palette of 1.06 billion colors	10-bit colors Display Port : 1.07 billion (maximum) colors 8-bit colors : 16.77 million from a palette of 68 billion colors	16.77 million from a palette of 1.06 billion colors	16.77 million from a palette of 8.50 billion colors	16.77 million from a palette of 1.06 billion colors	Display Colors
Viewing Angles (H, V)	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	Viewing Angles (H, V)
Brightness	MX300W : 300 cd/m² (typical), MX300W-C : 265 cd/m² (typical)	320 cd/m² (typical)	320 cd/m² (typical)	350 cd/m² (typical)	300 cd/m² (typical)	300 cd/m² (typical)	250 cd/m² (typical)	Brightness
Contrast Ratio	1000 : 1 (typical)	1000 : 1 (typical)	850 : 1 (typical)	1200 : 1 (typical)	1000 : 1 (typical)	2000 : 1 (typical)	1500 : 1 (typical)	Contrast Ratio
On/Off Response Time	12 ms (typical)	13 ms (typical)	16 ms (typical)	12 ms (typical)	16 ms (typical)	20 ms (typical)	25 ms (typical)	On/Off Response Time
Midtone Response Time [1]	6 ms (typical)	5 ms (typical)	6 ms (typical)	6 ms (typical)	8 ms (typical)	8 ms (typical)	–	Midtone Response Time [1]
Scanning Frequency (H, V)	Digital : 31 - 100 kHz, 25.5 - 61 Hz (VGA Text : 69 - 71 Hz) Frame synchronous mode : 59 - 61 Hz	Digital : 31 - 76 kHz, 59 - 61 Hz (VGA Text : 69 - 71 Hz) Analog : 24 - 76 kHz, 49 - 86 Hz (1600 x 1200 : 76 Hz, 1920 x 1200 : 61 Hz) Frame synchronous mode : 59 - 61Hz	Digital : 31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) Analog : 24 - 94 kHz, 49 - 86 Hz (1600 x 1200 : 76 Hz, 1920 x 1200 : 61 Hz) Frame synchronous mode : 59 - 61 Hz	Digital : 31 - 76 kHz, 59 - 61 Hz (VGA Text : 69 - 71 Hz) Analog : 24 - 76 kHz, 49 - 86 Hz (1600 x 1200 : 61 Hz, 1920 x 1200 : 61 Hz) Frame synchronous mode : 59 - 61 Hz	Digital : 31 - 76 kHz, 59 - 61 Hz (VGA Text : 69 - 71 Hz) Analog : 24 - 80 kHz, 49 - 76 Hz (1600 x 1200 : 61 Hz) Frame synchronous mode : 59 - 61 Hz	Digital : 31 - 64 kHz, 59 - 61 Hz (VGA Text : 69 - 71 Hz) Analog : 24.8 - 80 kHz, 50 - 75 Hz	Digital : 31 - 64 kHz, 59 - 61 Hz (VGA Text : 69 - 71 Hz) Analog : 24.8 - 80 kHz, 50 - 75 Hz	Scanning Frequency (H, V)
Dot Clock	Digital : 269 MHz	Digital : 162 MHz, Analog : 170 MHz	Digital : 162 MHz, Analog : 202.5 MHz	Digital : 162 MHz, Analog : 170 MHz	Digital : 162 MHz, Analog : 162 MHz	Digital : 108 MHz, Analog: 135 MHz	Digital : 108 MHz, Analog: 135 MHz	Dot Clock
Input Signals	DVI 1.0	Digital : DVI 1.0, DisplayPort 1.1a, Analog : RGB Analog	Digital : DVI 1.0, Analog : RGB Analog	Digital : DVI 1.0, DisplayPort 1.1a, Analog : RGB Analog	Digital : DVI 1.0, Analog : RGB Analog	Digital : DVI 1.0, Analog : RGB Analog	Digital : DVI 1.0, Analog : RGB Analog	Input Signals
Sync Formats	–	Separate, Composite	Separate, Composite	Separate, Composite	Separate, Composite	Separate	Separate	Sync Formats
Input Terminal	DVI-D 24 pin x 2 (Dual Link supported by Signal 1 only)	Digital / Analog : DVI-I 29 pin x 2 Digital : DisplayPort x 1	DVI-I 29 pin x 2	Digital / Analog : DVI-I 29 pin x 2 Digital : DisplayPort x 1	DVI-I 29 pin x 1, D-Sub mini 15 pin x 1	DVI-D 24 pin x 1, D-Sub mini 15 pin x 1	DVI-D 24 pin x 1, D-Sub mini 15 pin x 1	Input Terminal
USB Ports	1 upstream, 2 downstream	1 upstream, 2 downstream	1 upstream, 2 downstream	1 upstream, 2 downstream	1 upstream, 2 downstream	1 upstream	1 upstream	USB Ports
USB Standard	Rev. 2.0	Rev. 2.0	Rev. 2.0	Rev. 2.0	Rev. 2.0	Rev. 2.0	Rev. 2.0	USB Standard
Power Requirements	AC 100 - 120 V, 200 - 240 V : 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V : 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V: 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V : 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V : 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V : 50 / 60 Hz	AC 100 - 120 V, 200 - 240 V: 50 / 60 Hz	Power Requirements
Power Consumption	170 watts	95 watts	110 watts	90 watts	70 watts	43 watts	33 watts	Power Consumption
Power Save Mode	Less than 2 watts	Less than 0.9 watts	Less than 2 watts	Less than 0.9 watts	Less than 2 watts	Less than 0.8 watts	Less than 0.6 watts	Power Save Mode
Sensor	Backlight Sensor	Backlight Sensor	Backlight Sensor	Backlight Sensor	Backlight Sensor	Backlight Sensor	Backlight Sensor	Sensor
Power Management	Digital : DVI DMPM	Digital : DVI DMPM, Analog : VESA DPMS	Digital : DVI DMPM, Analog : VESA DPMS	Digital : DVI DMPM, Analog : VESA DPMS	Digital : DVI DMPM, Analog : VESA DPMS	Digital : DVI DMPM, Analog : VESA DPMS	Digital : DVI DMPM, Analog : VESA DPMS	Power Management
OSD Languages	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	English, German, French, Italian, Japanese, Spanish, Swedish	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese	OSD Languages
Net Weight (With Stand / Without Stand)	MX300W 15.7 kg, MX300W-C 16.4 kg / MX300W 11.2 kg, MX300W-C 11.9 kg	10.7 kg / 7.1 kg	10.4 kg / 7.4 kg	9.6 kg / 6.6 kg	9.7 kg / 6.7 kg	7.2 kg / 5.2 kg	5.9 kg / 3.9 kg	Net Weight (With Stand / Without Stand)
Hole Spacing	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	VESA standard 100 x 100 mm	Hole Spacing
Certifications and Standards	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2006, RoHS	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2009, RoHS	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2006, RoHS	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2009, RoHS	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2006, RoHS	CE (Medical Device Directive), TÜV/GM (EN60601-1), cTÜVus (UL60601-1, CSA-C22.2 No.601-1), CB (IEC60601-1), VCCI-B, FCC-B, Canadian ICES-003-B, c-Tick, FDA 510(k)[2], EIZO Eco Products 2006, RoHS	TÜV/S, TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, UL (cTÜVus), CSA (cTÜVus), CE, c-Tick, CB, VCCI-B, FCC-B, Canadian ICES-003-B, EIZO Eco Products 2006, RoHS	Certifications and Standards
Supplied Accessories	AC power cord, Dual-Link signal cable (DVI-D ~ DVI-D), signal cable (DVI-D ~ DVI-D), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), ScreenCleaner (MX300W-C only), warranty card	AC power cord, signal cables (DVI-D ~ DVI-D, DVI-I ~ D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (user's manual,RadiCS LE, ScreenManager Pro for Medical), warranty card	AC power cord, signal cables (DVI-D ~ DVI-D, DVI-I ~ D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), warranty card	AC power cord, signal cables (DVI-D ~ DVI-D, DVI-I ~ D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), warranty card	AC power cord, signal cables (DVI-D ~ DVI-D, D-Sub mini 15 pin ~ D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), warranty card	AC power cord, signal cables (DVI-D ~ DVI-D, D-Sub mini 15 pin ~ D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), warranty card	AC power cord, signal cables (D-Sub mini 15 pin ~ D-Sub mini 15 pin, DVI-D ~ DVI-D), USB cable, EIZO LCD Utility Disk (user's manual, RadiCS LE, ScreenManager Pro for Medical), warranty card	Supplied Accessories
Warranty	Five Years	Five Years	Five Years	Five Years	Five Years	Five Years	Five Years	Warranty
Dimensions [Unit : mm]					 MX220W-FS : Dimensions (With Stand) : 511 (W) x 347.5 - 521.5 (H) x 235.5 (D) mm, Height Adjustment 174 mm, Pivot 90°, Tilt 30°				Dimensions [Unit : mm]
								

[1]Average response time measured between each grayscale level of 31, 63, 95, 127, 159, 191, and 223. [2]Display of mammography images for diagnosis is not supported.

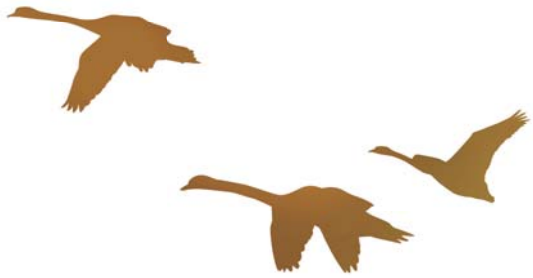

EIZO NANAO CORPORATION
153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6792 Fax +81-76-277-6793
radiforce.com

All product names are trademarks or registered trademarks of their respective companies. RadiCS and RadiNET are trademarks, and EIZO, RadiForce, and ScreenManager are registered trademarks of Eizo Nanao Corporation. Specifications are subject to change without notice.

Copyright © 2009 EIZO NANAO CORPORATION. All rights reserved. (091003) Printed in Japan, 10, 2009, 5K